


Bowen

7030.01 - 7030.39

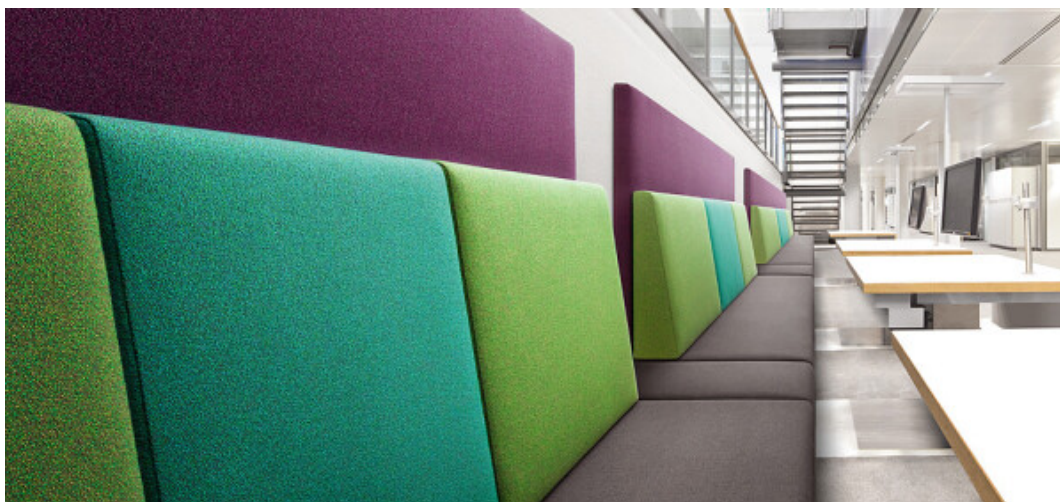

Product

Upholstery

Description

Blended woollen upholstery fabric

Composition

92% wool / 8% polyamide

Width

± 140 cm, ± 55 inches

Weight

± 530 gr/m², ± 17 oz/yd¹

Flame retardancy

BS 5852 , Crib 5

Cal TB 117-2013, section 1 , Pass

EN 1021/1-2 , Pass

IMO 2010 FTP part 8 , Pass

NF D 60-013 , Pass

NFPA 260 , Class 1

UNI 9175 , Classe 1

Abrasion

**ASTM D3597/D4157 (#10 cotton duck) ,
35.000 double rubs Wyzenbeek**

ISO 12947-2 , 100.000 rubs Martindale

Pilling

ASTM D3511

5 (scale 1-5)

ISO 12945-2

4 (scale 1-5)

Colorfastness to crocking

AATCC 8

5 (scale 1-5) wet / 5 (scale 1-5) dry

ISO 105 X12

4-5 (scale 1-5) wet / 4-5 (scale 1-5) dry

Colorfastness to light

AATCC 16.2 opt.1 or 16.3 opt. 3

5 (scale 1-5)

ISO 105 B02

4 - 5 (scale 1-8)

Seam slippage

ASTM D4034

120 lbs warp / 87 lbs weft

ISO 13936-2

5 mm warp / 4.5 mm weft

Breaking strength

ASTM D5034

212 lbs warp / 191 lbs weft

Labels



USCG -
EU MRA
0038



STANDARD
100
510-0100
Hohenstein RTT

Care & Maintenance



Bowen

7030.01 - 7030.39

								
7030.01	7030.02	7030.03	7030.04	7030.05	7030.06	7030.07	7030.08	7030.09
								
7030.10	7030.11	7030.12	7030.13	7030.14	7030.15	7030.16	7030.17	7030.18
								
7030.19	7030.20	7030.21	7030.22	7030.23	7030.24	7030.25	7030.26	7030.27
								
7030.28	7030.29	7030.30	7030.31	7030.32	7030.33	7030.34	7030.35	7030.36
								
7030.37	7030.38	7030.39						