


Bowen

7030.01 - 7030.39

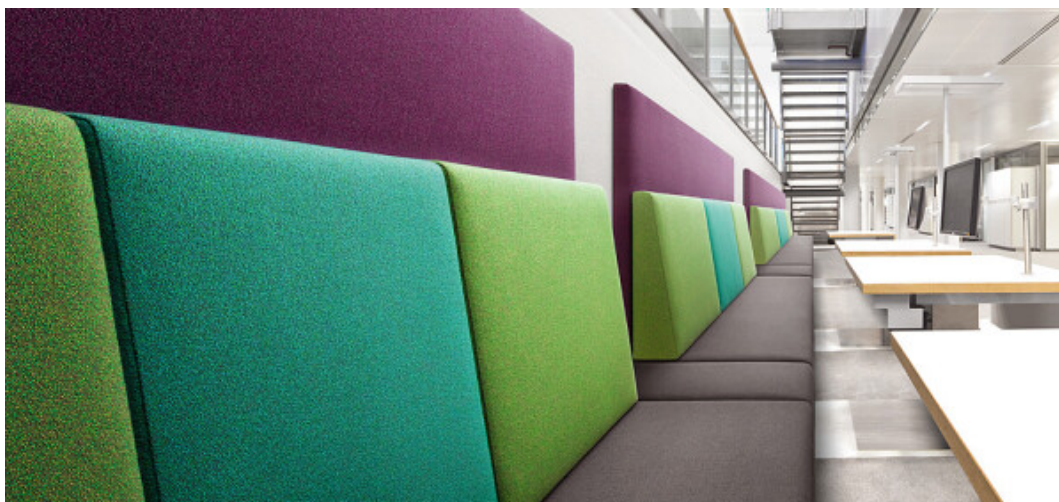

Producto

Tapicerías

Descripción

Tela para tapicería de lana mezclada

Composición

92% lana / 8% poliamida

Anchura

± 140 cm, ± 55 inches

Peso

± 530 gr/m², ± 17 oz/yd²

Combustión retardada

BS 5852 , Crib 5

Cal TB 117-2013, section 1 , Pass

EN 1021/1-2 , Pass

IMO 2010 FTP part 8 , Pass

NF D 60-013 , Pass

NFPA 260 , Class 1

UNI 9175 , Classe 1

Resistencia al desgaste

ASTM D3597/D4157 (#10 cotton duck) ,

35.000 double rubs Wyzenbeek

ISO 12947-2 , 100.000 rubs Martindale

Pilling

ASTM D3511

5 (scale 1-5)

ISO 12945-2

4 (scale 1-5)

Resistencia al frotamiento

AATCC 8

5 (scale 1-5) wet / 5 (scale 1-5) dry

ISO 105 X12

4-5 (scale 1-5) wet / 4-5 (scale 1-5) dry

Insensibilidad a la luz

AATCC 16.2 opt.1 or 16.3 opt. 3

5 (scale 1-5)

ISO 105 B02

4 - 5 (scale 1-8)

Resistencia al deslizamiento de costuras

ASTM D4034

120 lbs warp / 87 lbs weft

ISO 13936-2

5 mm warp / 4.5 mm weft

Resistencia a la tensión

ASTM D5034

212 lbs warp / 191 lbs weft

Etiquetas



USCG -
EU MRA
0038



STANDARD
100
S10-0100
Hohenstein HTI

Cuidado & Mantenimiento



Bowen

7030.01 - 7030.39
