


# Dikson

7063.01 - 7063.14

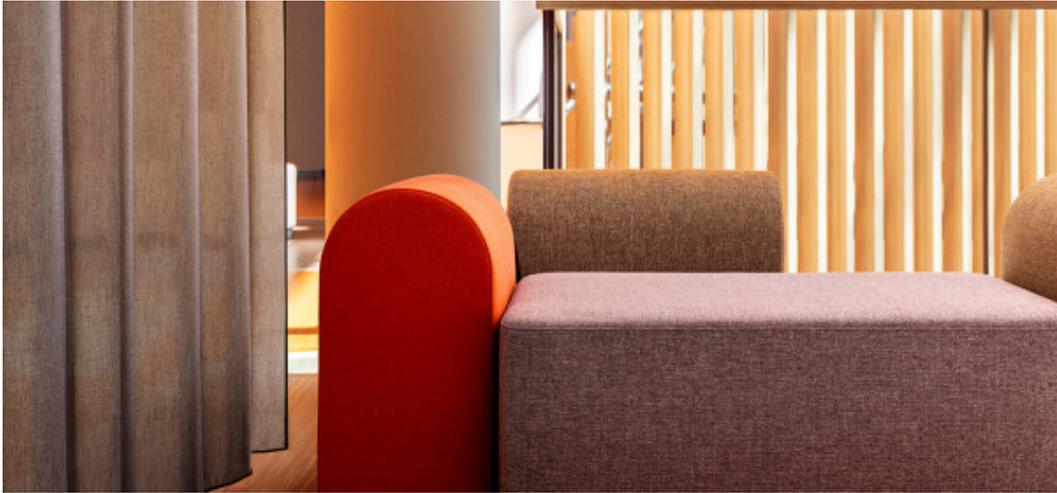

## Product

### Upholstery

## Description

**Upholstery fabric with a rich blend of soft chenille yarns**

## Composition

**> 40% recycled polyester FR / < 60% polyester FR**

## Width

**± 140 cm, ± 55 inches**

## Weight

**± 819 gr/m<sup>2</sup>, ± 26 oz/yd<sup>2</sup>**

## Flame retardancy

**BS 5852 , Crib 5  
Cal TB 117-2013, section 1 , Pass  
DIN 4102 , B1  
EN 1021/1-2 , Pass  
IMO 2010 FTP part 8 , Pass  
NF P 92/503-507 , M1  
NFPA 260 , Class 1**

## Abrasion

**ASTM D3597/D4157 (#10 cotton duck) ,  
100.000 double rubs Wyzenbeek  
ISO 12947-2 , 100.000 rubs Martindale**

## Pilling

**ASTM D3511  
5 (scale 1-5)  
ISO 12945-2  
4-5 (scale 1-5)**

## Colorfastness to crocking

### AATCC 8

4 (scale 1-5) wet / 4 (scale 1-5) dry

### ISO 105 X12

4-5 (scale 1-5) wet / 4-5 (scale 1-5) dry

## Colorfastness to light

### AATCC 16.2 opt.1 or 16.3 opt. 3

4.5 (scale 1-5)

### ISO 105 B02

6 (scale 1-8)

## Seam slippage

### ASTM D4034

89 lbs warp / 96 lbs weft

### ISO 13936-2

2 mm warp / 2 mm weft

## Breaking strength

### ASTM D5034

474 lbs warp / 262 lbs weft

### ISO 13934-1

2500 N warp / 1550 N weft

## Labels



USCG -  
EU MRA  
0038



STANDARD  
100  
507-0023  
Hohenstein HTTI

## Care & Maintenance



## Shrinkage

### Shrinkage 30°

-2.6% warp / -1.9% weft

# Dikson

7063.01 - 7063.14

---



7063.01



7063.02



7063.03



7063.04



7063.05



7063.06



7063.07



7063.08



7063.09



7063.10



7063.11



7063.12



7063.13



7063.14