


Naltar

8083.01 - 8083.16

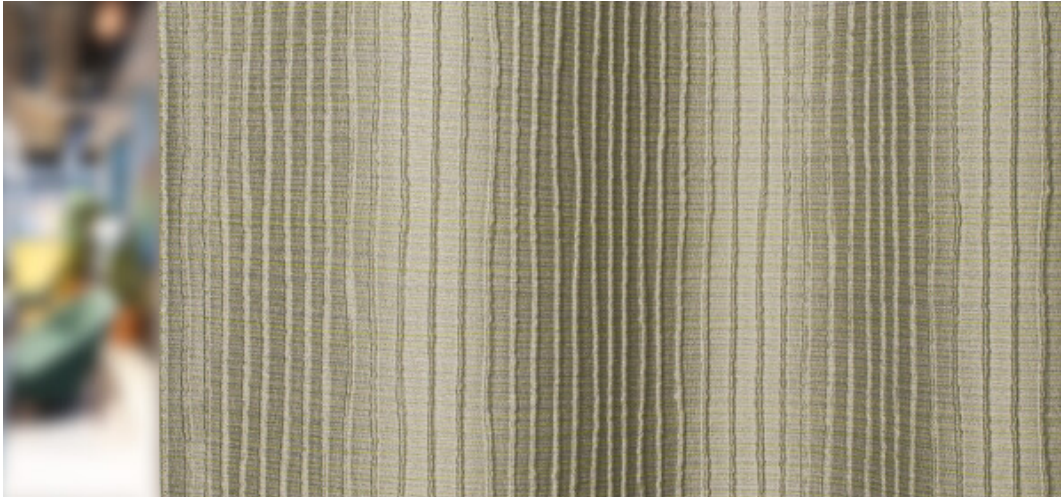

Product

Curtain

Description

Double weave with a vertical organic 3D rib structure in tonal shades

Composition

100% flame retardant polyester

Width

± 144 cm, ± 57 inches

Weight

± 273 gr/m¹, ± 9 oz/yd¹

Sound absorption

ISO 354, alpha w

0.50 (pleated)

Visual & Thermal comfort

EN 410/EN 14501

Test available

Flame retardancy

BS 5867-2 , Type C

CAN/ULC S109 , Pass

DIN 4102 , B1

EN 13773 , Class 1

IMO 2010 FTP part 7 , Pass

NF P 92/503-507 , M1

NFPA 701 (meth. 1 or 2) , Pass

Übereinstimmung , Pass

UNI VF 8456-8457 , Classe 1

Colorfastness to crocking

AATCC 8 (solids)

5 (scale 1-5) wet / 5 (scale 1-5) dry

ISO 105-X12

4-5 (scale 1-5) wet / 4-5 (scale 1-5) dry

Colorfastness to light

AATCC 16.2 option 1 or 16.3 opt 3

5 (scale 1-5)

ISO 105-B02

6 (scale 1-8)

Seam slippage

ASTM D434

29 lbs warp / 29 lbs weft

ISO 13936-2

2.5 mm warp / 2.7 mm weft


Labels



USCG -
EU MRA
0038



STANDARD
100
507-0023
Hohenstein HTTI



Baustoffklasse schwerentflammbar
DIN 4102, B1

Care & Maintenance



Shrinkage

Shrinkage 70°

-1.4% warp / +1.5% weft

Naltar

8083.01 - 8083.16



8083.01



8083.02



8083.03



8083.04



8083.05



8083.06



8083.07



8083.08



8083.09



8083.10



8083.11



8083.12



8083.13



8083.14



8083.15



8083.16