


Moore

7075.01 – 7075.16

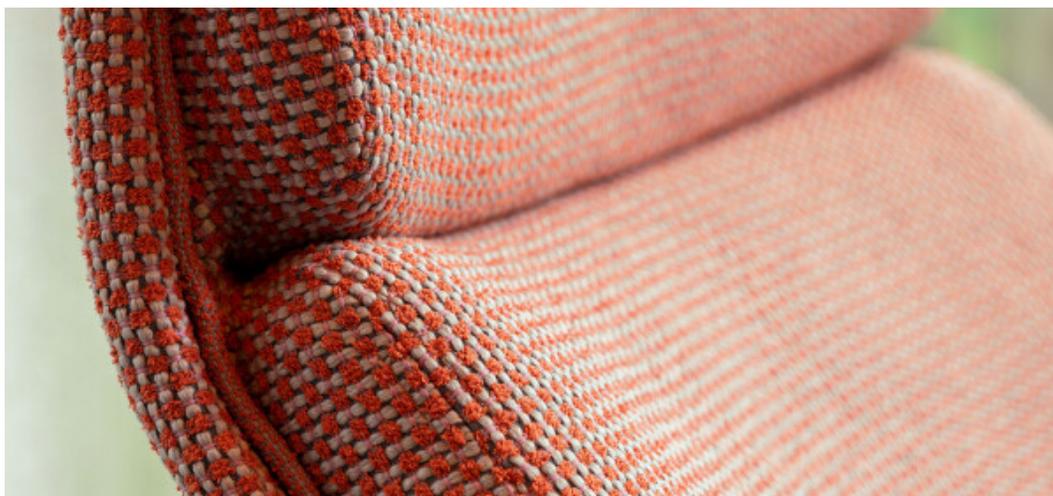

Product

Upholstery

Description

100% recycled upholstery fabric with a tactile, graphic grid in a large-scale, multicoloured weave in 16 colourways

Composition

100% recycled polyester FR

Width

± 141 cm, ± 56 inches

Weight

± 835 gr/m², ± 27 oz/yd²

Flame retardancy

BS 5852 , Crib 5

Cal TB 117-2013, section 1 , Pass

DIN 4102 , B1

EN 1021/1-2 , Pass

IMO 2010 FTP part 8 , Pass

NF P 92/503-507 , M1

NFPA 260 , Class 1

UNI 9175 , Classe 1

Abrasion

ASTM D3597/D4157 (#10 cotton duck) ,

100.000 double rubs Wyzenbeek

ISO 12947-2 , 70.000 rubs Martindale

Pilling

ASTM D3511

5 (scale 1-5)

ISO 12945-2

4-5 (scale 1-5)

Colorfastness to crocking

AATCC 8

5 (scale 1-5) wet / 5 (scale 1-5) dry

ISO 105 X12

4-5 (scale 1-5) wet / 4-5 (scale 1-5) dry

Colorfastness to light

AATCC 16.2 opt.1 or 16.3 opt. 3

4.5 (scale 1-5)

ISO 105 B02

6 (scale 1-8)

Seam slippage

ASTM D4034

136 lbs warp / 126 lbs weft

ISO 13936-2

2 mm warp / 2 mm weft

Breaking strength

ASTM D5034

302 lbs warp / 296 lbs weft

ISO 13934-1

1790 N warp / 1760 N weft

Labels



USCG -
EU MRA
0038



STANDARD
100
S21-3365
Hohenstein HTTI

Care & Maintenance



Shrinkage

Shrinkage 50°

-1.6% warp / -3% weft

Moore

7075.01 – 7075.16



7075.01



7075.02



7075.03



7075.04



7075.05



7075.06



7075.07



7075.08



7075.09



7075.10



7075.11



7075.12



7075.13



7075.14



7075.15



7075.16